

Technical manual

GM Busway

Cast-resin busway
GMC in copper · GMA in aluminum

IP55–IP68

Degree of protection

250–5,000A


Rated current

690V

Operating voltage

GMC · GMA

Copper · Aluminum

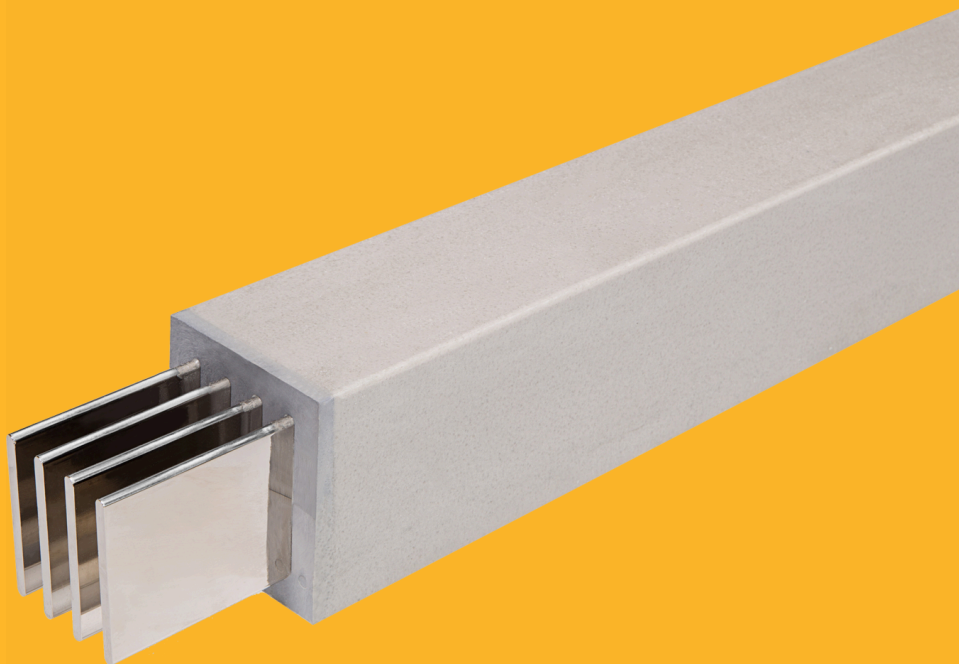

Contents

Contents

1	GMC manufacturer	02
1.1	About this manual	02
1.2	Wetown Electric Group	03
1.3	Manufacturer backing	04
2	GM busway system	05
2.1	GM busway applications	05
2.2	Components and names	06
3	GMC · Construction features	07
4	GMC · Technical data (copper)	08
4.1	Specifications, impedance and short-circuit rating	08
4.2	Dimensions	09
5	GMC · Components	10
5.1	Straight length and switchboard connection	10
5.3	Bends	11
5.4	Offsets (Z-bends) and combination bend	11
5.5	Tees	12
5.6	Joint	12
6	GMC · Installation	13
7	GMA · Aluminum busway	14
7.1	What GMA is; indoor or outdoor use	14
7.3	Degree of protection and how to choose	15
7.5	Technical data	16
7.6	Voltage drop and insulating compound	17
7.7	GMA components	18
7.8	GMC or GMA: how to choose and order	19
8	Quote your project	20

1.1 About this manual

Scope: two GM products

GMC: copper, China, 400A to 5,000A.

GMA: aluminum, Colombia, 250A to 4,000A.

Sections 3 to 6: GMC. Section 7: GMA.

Conventions

Period for decimals, comma for thousands.

For example: 0.093 or 1,600.

Every table states the product:

GMC (copper) or GMA (aluminum).

Data may change due to technical or production improvements.
Confirm values with ElectriDistro when ordering.

1.2 · Manufacturer

Wetown Electric Group

WETOWN

The busway manufacturer with the largest production plant in Asia.
30+ years designing, testing and manufacturing busway in China.



Wetown Electric Group headquarters · China

136,000m²

industrial complex
84,000m² built

700,000m

of busway
per year

30+

years manufacturing
busway


40+

countries with
installed projects

1.2.1 Manufacturing capacity

Plants	4 manufacturing bases and 10+ subsidiaries in China and abroad
Annual capacity	Busway 700,000m · copper bar 10,000t · aluminum profile 4,000t
Research	Three R&D centers in China
In-house laboratory	40+ tests · recognized by CNAS, DEKRA (formerly KEMA), ASTA and TÜV
Manufacturing	Automated assembly lines · high-speed saw cutting · silver-plated contacts
Technical alliances	GE (2007) · ABB (2016) · Westinghouse (2017)
Listed company	Shanghai Stock Exchange, STAR Market · code 688226

1.2.2 Global presence

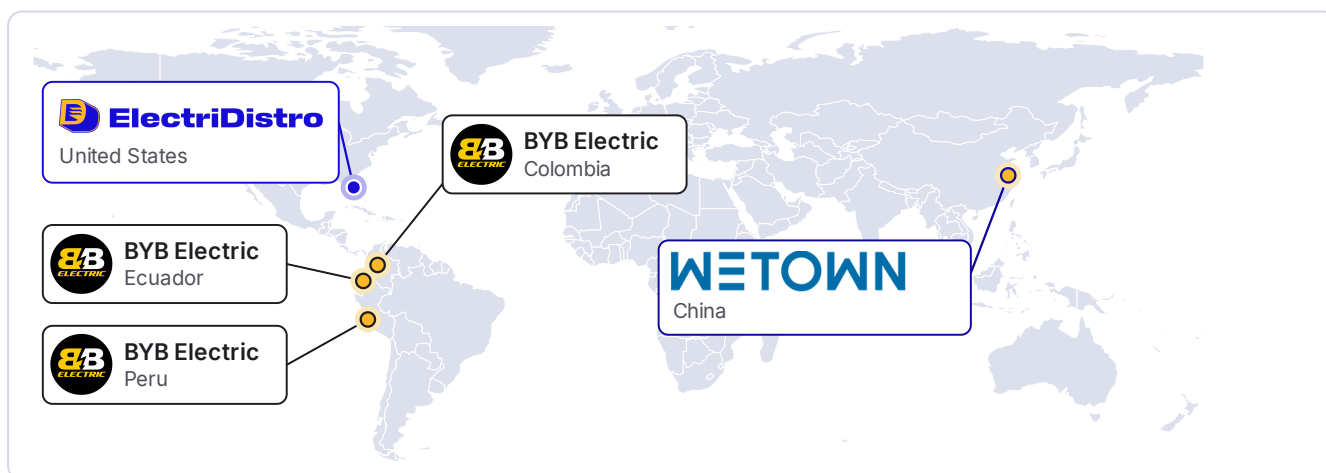

1.3 · Manufacturer

Manufacturer backing

1.3.1 Technical alliances with global brands



Signing of the Wetown · ABB joint venture

- Wetown works with **GE, ABB and Westinghouse** as technical allies.
- With ABB, it formed a joint venture: **Jiangsu Wetown ABB Busway**.
- That shared know-how backs every Wetown busway.

 Since 2007
  Since 2016
  Since 2017

Extensive technical know-how, without the overhead of a global brand.

That's the ElectriDistro competitive edge.

1.3.2 Certifications

Management systems	 ISO 9001 Quality	 ISO 14001 Environment	 OHSAS 18001 Health and safety	 SA 8000 Social accountability			
Product certification	 UL United States	 CE European Union	 CCC China	 CIDET Colombia	 EAC Eurasian Union	 GOST-R Russia	 RoHS Restricted substances
Testing laboratories	 DEKRA Netherlands · formerly KEMA		 ASTA United Kingdom				

1.3.3 Manufacturer reference projects

 Marina Bay Sands Hotel Singapore · hotel	 Casino Tower Macau · casino and hotel	 National Stadium Beijing · stadium	 Asian Games Stadium Stadium
 Shenzhen Baohe Hospital Shenzhen · hospital	 Wanda Plaza Shopping center	 Panzhihua Steel (Group) Steel industry	 Gezhouba Group Hydropower

1.3.4 Authorized distribution chain


WETOWN
 Manufacturer
Wetown Electric Group
 Design, testing and manufacturing


ElectriDistro
 Exclusive distributor
ElectriDistro
 Represents Wetown in the Americas


BYB Electric
 Authorized distribution channels
BYB Electric
 BYB Electric Ecuador
 BYB Electric Colombia
 BYB Electric Peru
 Sales, technical support and warranty.

2 · System

GM busway system

Feeder busway fully encapsulated in cast epoxy resin.
For environments with water, dust, salt or chemical agents.
Two products: GMC in copper and GMA in aluminum.

IP55–IP68

GMC: IP68
GMA: IP55, IP65 or IP68

250–5,000A

GMC: 400–5,000A
GMA: 250–4,000A

690V

operating voltage
insulation: 1,000V

50 / 60Hz

rated
frequency

Conductors

GMC: electrolytic copper.
GMA: aluminum.

Encapsulation

Epoxy resin
Halogen-free mineral filler.

Installation

Horizontal (suspended)
or vertical.

2.1 GM busway applications


Where conventional busway cannot withstand the environment.



Ports, docks and shipyards



Petrochemical and metals

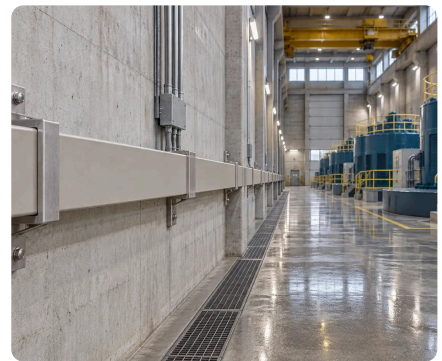

Hydroelectric plants



Buried installation



Flood-prone and submerged areas




Outdoor and tunnels

Illustrative images

2 · System

Components and names

The names in this manual match the ElectriDistro quote.

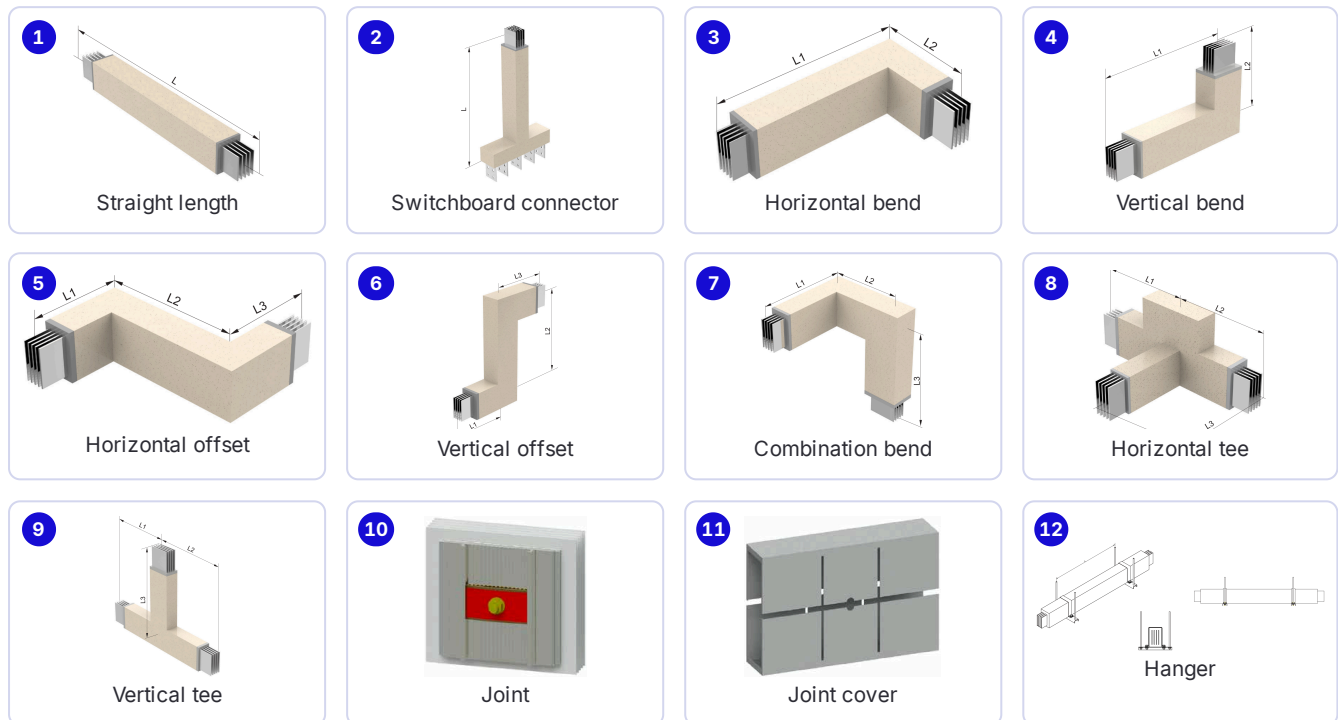


	ElectriDistro name	Also called
1	Straight length	Feeder length, straight section
2	Switchboard connector	Flanged end, transformer connection
3	Horizontal bend	Flatwise L-bend
4	Vertical bend	Edgewise L-bend
5	Horizontal offset	Flatwise Z-bend
6	Vertical offset	Edgewise Z-bend
7	Combination bend	Flatwise + edgewise bend
8	Horizontal tee	Flatwise tee, T-branch
9	Vertical tee	Edgewise tee
10	Joint	Joint pack, section-to-section joint
11	Joint cover	GMA indoor IP65 only
12	Hanger	Support, hanger bracket
13	Vertical spring hanger	Spring support, spring hanger

3 · Construction features

GMC: design and performance

What cast-resin construction delivers in each environment.



3.1 IP68 degree of protection

- Straight length submerged in 1m of water for 9,000 hours.
- After the test, it is energized safely.
- Operates reliably even when submerged deeper than 1m.



3.2 Mechanical and environmental resistance

- Withstands 20-joule mechanical impacts.
- Withstands a high-pressure fire-hose jet.
- No cracking in long-term service from -50°C to $+55^{\circ}\text{C}$.



3.3 Chemical and corrosion resistance

- Excellent resistance to corrosion and chemical agents.
- Resistant to electromagnetic interference.
- Resistant to rodents and insects.



3.4 Materials

- Copper: high-purity electrolytic copper.
- Epoxy resin with halogen-free mineral filler.
- No toxic gas emission (MSDS report).

GMC: a single model

IP68 along the whole run, indoor and outdoor.
Resin-fused joints, no joint cover.

Need IP55 or IP65, or prefer aluminum?

See GMA busway, section 7.
Indoor use: IP55, IP65 or IP68.

4.1 · Technical data

GMC · Copper: specifications, impedance and short-circuit rating

Electrical data for GMC busway, with copper conductors.

Table 4.1 Electrical specifications

GMC · COPPER

Operating voltage	400–690V	Ambient temperature	–50°C to +55°C
Insulation voltage	690/1,000V	System	3-phase, 4-wire or 3-phase, 5-wire
Rated current	400–5,000A	Enclosure color	Light gray or light yellow
Frequency	50/60Hz	Installation	Horizontal (suspended) or vertical
Degree of protection	IP68	Standards	GB7251.1, GB7251.2, GB4208, GB5585.1, GB50054, IEC439-1, IEC439-2

Table 4.2 Short-circuit rating, impedance and voltage drop, 50Hz

GMC · COPPER

Rated current A	I _{cw} , 1s kA	I _{pk} kA	DC resistance, 20°C				Line-to-line voltage drop (V/m)				
			resistance, 10 ^{–6} Ω/m	Resistance 10 ^{–6} Ω/m	Reactance 10 ^{–6} Ω/m	Impedance 10 ^{–6} Ω/m	cosφ 0.6	cosφ 0.7	cosφ 0.8	cosφ 0.9	cosφ 1.0
400A			98.7	120.7	76.5	142.9	0.093	0.096	0.099	0.099	0.084
630A	30	63	74.0	94.6	64.6	114.6	0.118	0.122	0.125	0.124	0.103
800A			59.2	78.2	59.2	59.2	0.131	0.134	0.136	0.134	0.108
1,000A	50	105	49.4	66.5	49.3	49.3	0.137	0.141	0.143	0.141	0.115
1,250A			49.4	51.0	45.9	45.9	0.146	0.148	0.148	0.143	0.111
1,600A			26.9	39.9	41.1	41.1	0.157	0.158	0.157	0.150	0.111
2,000A	80	176	18.5	27.7	30.8	30.8	0.143	0.143	0.141	0.133	0.096
2,500A			14.8	23.4	24.9	24.9	0.147	0.148	0.146	0.139	0.102
3,200A			11.8	17.8	19.7	19.7	0.147	0.147	0.145	0.137	0.099
4,000A	100	220	9.3	14.5	15.3	15.3	0.145	0.146	0.144	0.137	0.100
5,000A			7.4	11.6	11.5	11.5	0.140	0.141	0.140	0.134	0.100

I_{cw} (rated short-time withstand current): current withstood for 1s without damage.

I_{pk} (rated peak withstand current): maximum short-circuit peak value withstood.

Resistance, reactance and impedance per phase, phase-to-neutral, at rated load in steady state.

Voltage drop with the load concentrated at the end of the run.

4.2 · Technical data

GMC · Copper: dimensions

Outside cross-section of the straight length by rated current and number of conductors.

4 conductors

3 phases + neutral
width 100mm

5 conductors

3 phases + neutral + ground
width 120mm

Table 4.3 Outside dimensions

GMC · COPPER

Rated current A	3-phase, 4-wire			3-phase, 5-wire		
	Conductors	Width W (mm)	Height H (mm)	Conductors	Width W (mm)	Height H (mm)
400A	4	100	60	5	120	60
630A	4	100	70	5	120	70
800A	4	100	80	5	120	80
1,000A	4	100	90	5	120	90
1,250A	4	100	110	5	120	110
1,600A	4	100	140	5	120	135
2,000A	4	100	190	5	120	170
2,500A	4	100	230	5	120	215
3,200A	4	100	310	5	120	300
4,000A	4	100	380	5	120	370
5,000A	4	100	460	5	120	480

How to use this table

1. Select the row by rated current.
2. Choose 4 or 5 conductors according to the project grounding system.
3. Use the width and height to size the space in the tray, trench or duct.

5.1–5.2 · Components


GMC: straight length and switchboard connection

The straight length carries power between switchboard, transformer and loads.
The connector joins the busway to the switchboard or transformer.

5.1 Straight length

Figure 5.1 Straight length


example 1

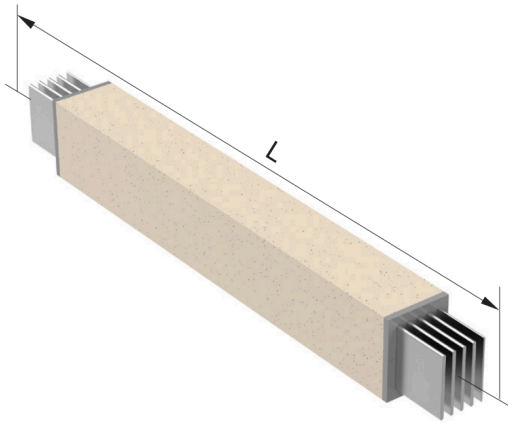

L: length of the straight section.

Figure 5.2 Straight length

example 2

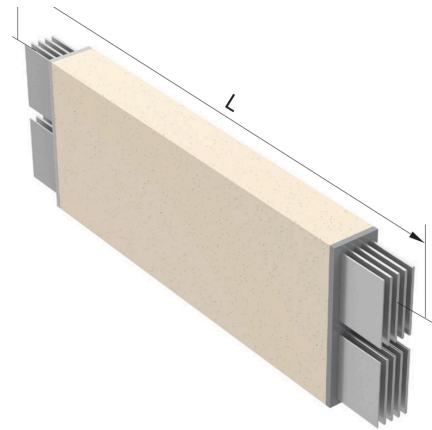

5.2 Switchboard or transformer connector

Figure 5.3 Switchboard connector

example 1


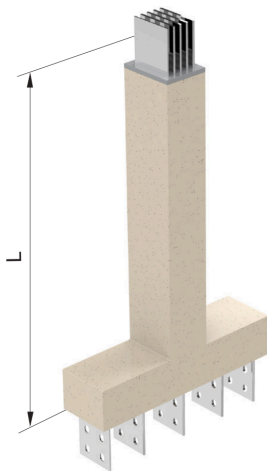


Figure 5.4 Switchboard connector

example 2

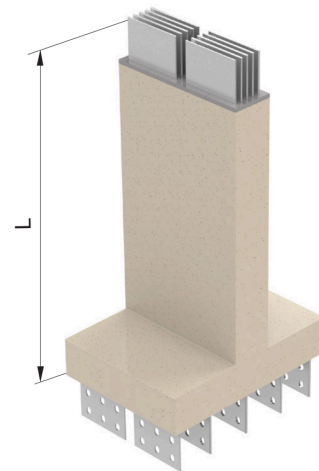

L: connector length. For special dimensions, contact ElectriDistro.

5.3 · Components

Bends

Change the direction of the run.

L1 and L2: length of each leg of the bend.

Figure 5.5 Horizontal bend

flatwise

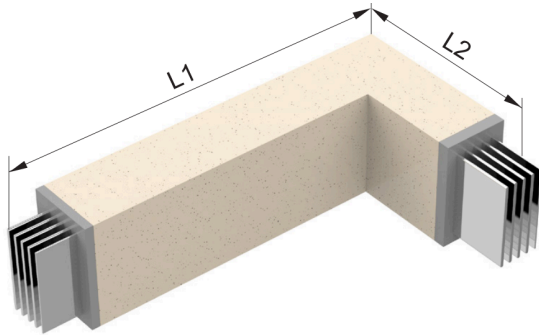


Figure 5.6 Vertical bend

edgewise




Table 5.1 Minimum bend dimensions

GMC · COPPER

Rated current	Horizontal bend, minimum L1×L2 (mm)	Vertical bend, minimum L1×L2 (mm)
400–2,500A	300×300	300×300×300
3,150–5,000A	350×350	350×350×350

5.4 Offsets and combination bend

Two changes of direction in a single piece, to clear obstacles.

L1, L2 and L3: length of each section of the piece.

Figure 5.7 Horizontal Z

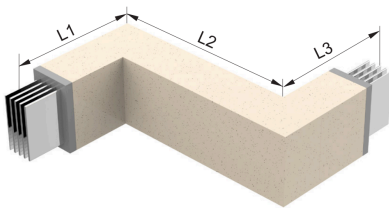


Figure 5.8 Vertical Z




Figure 5.9 Combination

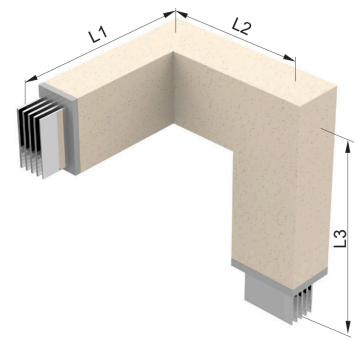


Table 5.2 Minimum dimensions, L1×L2×L3

GMC · COPPER

Rated current	Horizontal offset (mm)	Vertical offset (mm)	Combination bend (mm)
400–2,500A	300×300×300	300×300×300	300×300×300
3,150–5,000A	450×450×450	350×350×350	350×350×350

For special dimensions, contact ElectriDistro.

5.5 · Components

Tees

Split the run into two branches.

L1, L2 and L3: length of each leg of the tee.

Figure 5.10 Horizontal tee

flatwise

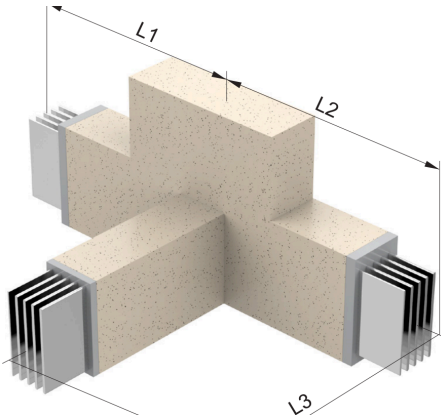


Figure 5.11 Vertical tee

edgewise

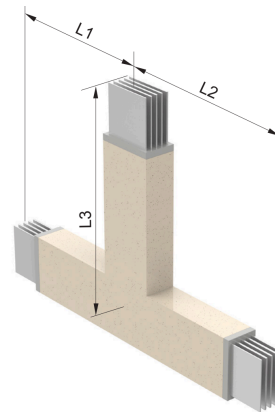


Table 5.3 Horizontal tee

GMC · COPPER

Rated current	Horizontal tee, L1×L2×L3 (mm)
400–1,250A	450×450×450
1,600–2,000A	500×500×500
2,500–4,000A	550×550×550
5,000A	650×650×650

Table 5.4 Vertical tee

GMC · COPPER

Rated current	Vertical tee, minimum L1×L2×L3 (mm)
400–2,500A	300×300×300
3,150–5,000A	350×350×350


5.6 Joint

Connects the straight lengths.

On GMC, every joint is fused with resin: IP68.

Figure 5.12 Joint

reference images

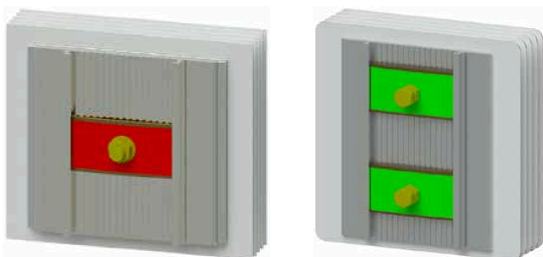

Function

Pressure-type joint between straight lengths.
 Moves easily during earthquakes.
 Absorbs short-circuit forces.
 Prevents joints from deforming or loosening.

Resin-fused joints · IP68

GMC is IP68 along the whole run, with no other rating option.

On site, every joint is fused with resin, per the manufacturer installation manual.

GMC does not use a joint cover.

6 · Installation


Installation

Supports for horizontal and vertical mounting.

6.1 Horizontal mounting: hanger

Figure 6.1 Hanger


L: distance between supports

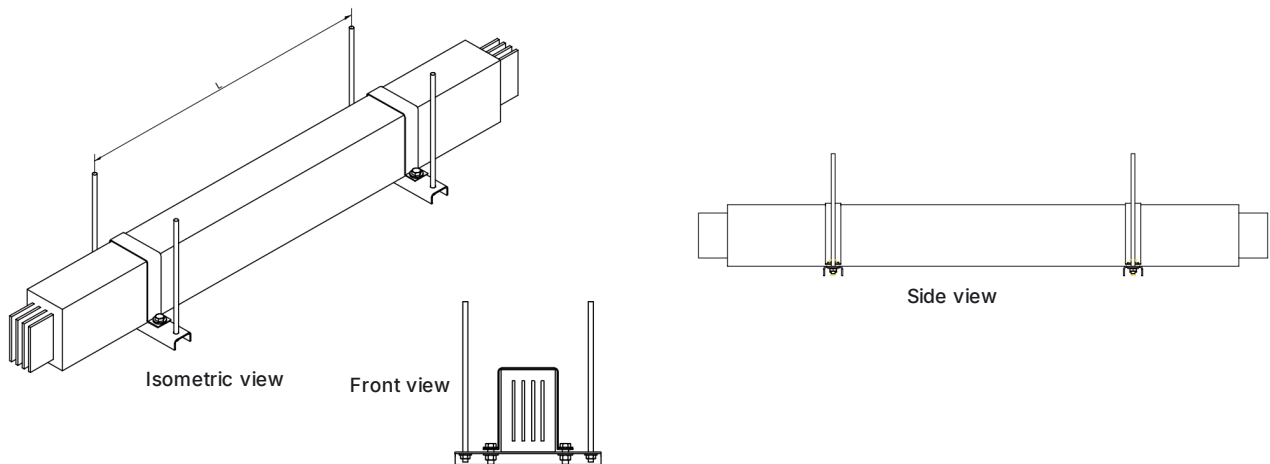

6.2 Vertical mounting: spring hanger

Figure 6.2 Vertical spring hanger

fixed to the wall or floor slab

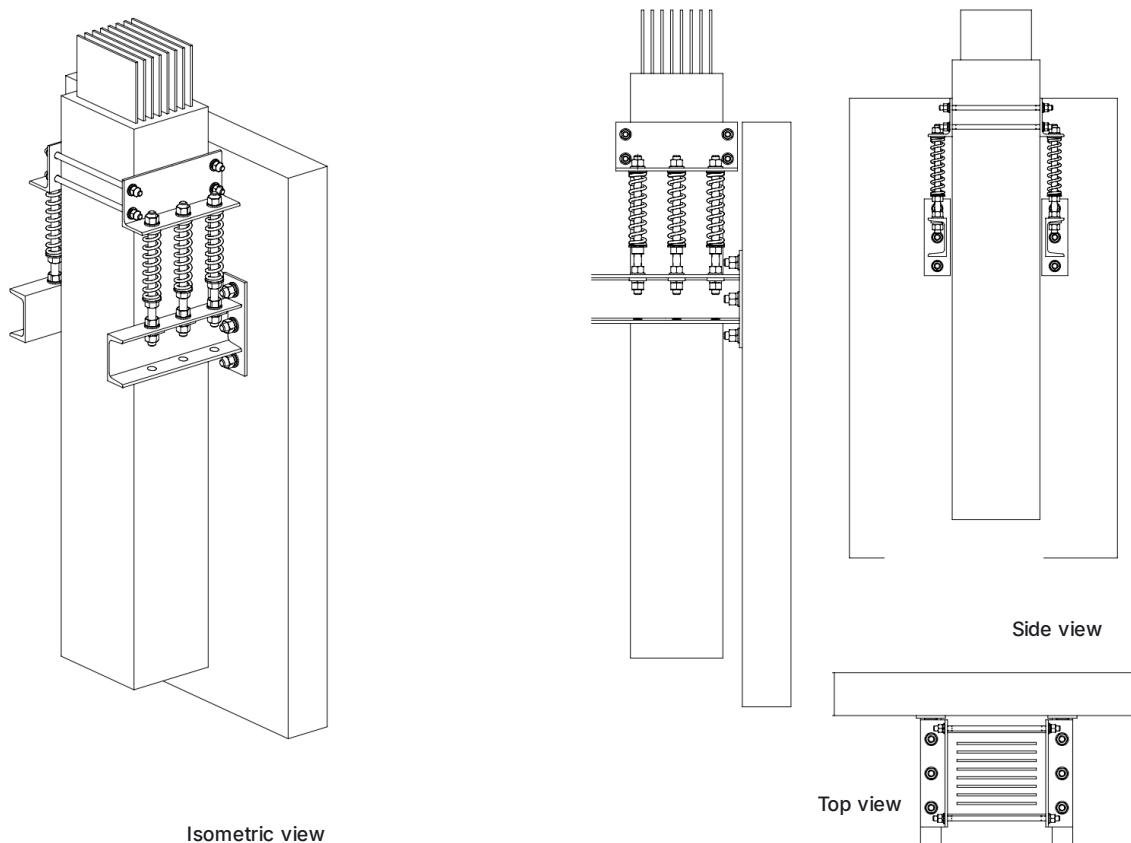

For support spacing L and special loads, contact ElectriDistro.

7 · GMA

GMA: aluminum, made in Colombia

Busway encapsulated in insulating compound, with aluminum conductors.

For environments with humidity, water, dust or corrosion.

250–4,000A

rated current
aluminum

IP55–IP68

indoor: IP55/65/68
outdoor: IP68 only

690V


operating voltage
insulation: 1,000V

IK10

impact
resistance

7.1 What GMA is

Figure 7.1 GMA straight length reference image

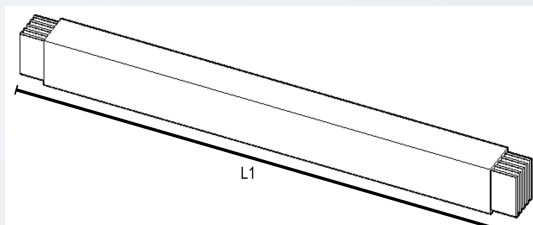

- Aluminum conductors encapsulated in insulating compound.
- Compact section: 78.6mm wide at every rating.
- Manufactured in Colombia by BYB Electric Colombia.
- Designed to IEC 61439-6 and UNE-EN 61439-6.
- Indoor or outdoor use, with the IP rating each run needs.

GMA is the stronger choice if...

- The project calls for encapsulated busway up to 4,000A.
- You want to pay for IP68 only on the runs that need it.
- You want a lighter run than a copper solution.
- The project is in Ecuador, Colombia or Peru: regional manufacturing.

Not the best fit if...

- The rating exceeds 4,000A: use GMC (copper).
- The specification requires copper: use GMC.
- The run is indoor, dry and IP55: LVA busway usually costs less.
- The project is medium voltage: use GM-Z MT busway.

7.2 Indoor or outdoor use

Indoor use

- No UV coating.
- Electrical rooms, basements, tunnels and covered ducts.
- Available in IP55, IP65 or IP68.

Outdoor use

- UV coating: protects the compound from sunlight.
- Outdoors, façades, yards, roofs and surface exits.
- IP68 only: resin-fused joints.

Indoor use: IP55, IP65 or IP68. Outdoor use: IP68 only.
Example: **GMA indoor IP68** = resin-fused joints, no UV coating.


7.3 · GMA

Degree of protection of the run

The IP rating depends on how the joints are protected.
One rating is chosen for the whole run.

**IP55****Standard joint**

- Joint without cover or resin.
- Protected against dust and water jets.
- For electrical rooms and dry ducts.
- Indoor use only.

**IP65****Joint cover**

- Each joint gets a cover.
- Dust-tight.
- Protected against water jets.
- For wet, wash-down or fine-dust areas.
- Indoor use only.

**IP68****Resin-fused joints**

- Each joint is resin-encapsulated on site.
- Dust-tight and suitable for immersion.
- For buried, submerged or flood-prone runs.
- Indoor or outdoor use.

7.4 How to choose use and IP

Quick rule: does the run get sunlight? → outdoor use, always IP68.
Standing water, immersion or a buried section? → IP68.

Site condition	Use	IP
Dry electrical room or indoor duct	Indoor	IP55
Indoor with humidity, wash-down or fine dust	Indoor	IP65
Flood-prone basement or room, no sunlight	Indoor	IP68
Outdoors with sun and rain, no standing water	Outdoor	IP68
Buried, submerged or flood-prone outdoors	Outdoor	IP68
Saline or chemical environment, under cover (ports, plants)	Indoor	IP65 or IP68

Ecuador: GM for buried or submerged runs

In Ecuador, GM is specified mainly for buried or submerged runs.
For those runs, specify **GMA outdoor IP68**.
Choose indoor IP68 only if no section of the run is exposed to sunlight.
In residential and commercial buildings, LVA busway is usually the choice.

7.5 · GMA

Technical data

Specifications, dimensions and short-circuit rating of GMA busway.

Table 7.1 Technical specifications

GMA · ALUMINUM

Type	Encapsulated in insulating compound	Use	Indoor, or outdoor with UV coating
Conductor	Aluminum	Impact resistance	IK10
Operating voltage	AC 690V	Maximum operating temperature	75°C
Insulation voltage	AC 1,000V	Design ambient temperature	30°C
Impulse withstand voltage	8kV	System	3 phases + 100% or 200% neutral + 100% isolated ground
Frequency	50/60Hz	Enclosure	Insulating compound
Rated current	250–4,000A	Coating color	Black
Short-circuit rating	20–100kA	Installation	Horizontal or vertical
Degree of protection	Indoor: IP55, IP65 or IP68 · Outdoor: IP68	Standard	UNE-EN 61439-6:2013 / IEC 61439-6:2012

Table 7.2 Dimensions, weight and short-circuit rating

GMA · ALUMINUM

Rated current A	Conductors per phase no.	Ground vs. phase %	I _{cw} , 1s kA	I _{pk} kA	Height mm	Width mm	Weight kg/m
250A	1	100	20	40	60	78.6	8.25
400A	1	100	30	63	80	78.6	10.54
630A	1	100	30	63	100	78.6	13.16
800A	1	100	30	63	125	78.6	16.19
1,000A	1	100	50	105	160	78.6	20.69
1,250A	1	100	50	105	210	78.6	27.08
1,600A	1	100	80	176	250	78.6	33.69
2,000A	1	100	80	176	270	78.6	38.01
2,500A	2	100	80	176	420	78.6	54.17
3,200A	2	100	100	220	500	78.6	67.38
4,000A	2	100	100	220	540	78.6	76.02

I_{cw}: short-time current withstood for 1s without damage.

I_{pk}: maximum short-circuit peak value withstood.

From 2,500A to 4,000A, the bar has 2 conductors per phase.

Approximate values.

7.6 · GMA

Voltage drop and insulating compound

Table 7.3 Resistance and voltage drop

GMA · ALUMINUM

Rated current A	Frequency Hz	R at 20°C μΩ/m	Voltage drop at rated current (mV/m) †			
			cos φ 0.70	cos φ 0.80	cos φ 0.90	cos φ 1.00
250A	60	160	53.1	55.5	56.4	51
400A	60	107	79.4	83.1	84.3	76.3
630A	60	80	106.2	111.1	112.7	102.0
800A	60	61	113.9	118.4	125.5	107.0
1,000A	60	46	114.9	119.7	121.2	107.5
1,250A	50/60	34	115.0	118.6	120.5	101.8
1,600A	50/60	28	115.5	118.4	120.2	98.8
2,000A	50/60	26	119.7	122.3	130.6	98.0
2,500A	50/60	17	116.5	118.7	124.5	97.8
3,200A	50/60	14	108.5	111.8	113.5	93.7
4,000A	50/60	13	102.5	106.9	114.7	93.6

† Three-phase mV/m at rated current; equals V/km.
Same values for indoor and outdoor use.

Table 7.4–7.5 Current correction factors

GMA · ALUMINUM

Busway position	Factor	Altitude (m a.s.l.)	Factor
Suspended in open air, edgewise or flatwise	1.00	0–1,000	1.00
Edgewise, against a wall (min. 40mm)	0.95	1,001–2,000	0.98
Flatwise, against a wall (min. 40mm)	0.93	2,001–3,000	0.95
Inside a closed duct, little ventilation	0.80	3,001–4,000	0.91
		4,001–5,000	0.87

Multiply the rated current by every factor that applies.

Example: 2,000A at 2,800m in a closed duct = $2,000 \times 0.95 \times 0.80 = 1,520A$.

7.6.2 Insulating compound

GMA · ALUMINUM

Electrical and thermal properties

Self-extinguishing	V0 6mm per UL94:1979
Rating	UL 94 V0, UL 746 HAI, HWI
Maximum operating temperature	75°C, including ambient temperature
Operating temperature	45°C above ambient temperature
Thermal conductivity	Good
Dielectric constant, 50Hz / 1 kHz / 1 MHz	5.32 / 4.03 / 3.50 (DIN 53483)
Volume resistivity	$1.5 \times 10^{12} \Omega \cdot \text{cm}$ * (DIN 53482)

Physical and mechanical properties

Color	Black
Specific gravity	1.55 (ISO 2781:1996)
Viscosity	Low (EN 45545, NF F 16101)
Flexibility	Semi-flexible
Hardness	Approx. Shore D 79 (CQP-537-2)
Tensile strength	9 N/mm ² * (CQP-545-2 / ISO 527)
Elongation at break	9% * (CQP-545-2 / ISO 527)

* Value being confirmed with the manufacturer: the source catalog states these units ambiguously.

7.7 · GMA

GMA components

Standard pieces of the GMA line.
Special pieces are made to order.

Figure 7.2 Switchboard connector




Figure 7.3 Bend L1, L2




Figure 7.4 Joint



Table 7.6 Piece dimensions

GMA · ALUMINUM


Piece	Rating	Minimum (mm)	Standard (mm)	Maximum (mm)
Straight length, L1	250–4,000A	500	3,000	3,000
Formed bend (LD), L1–L2	250–4,000A	500	500	1,500
Welded bend (LS), L1–L2	250–2,000A	500	500	1,500
Welded bend (LS), L1–L2	2,500–4,000A	800	800	1,500
U-piece, L1 to L5	250–4,000A	500	500	—
Tee, 90°	250–4,000A	to order	to order	—

7.7.1 Switchboard connector

GMA · ALUMINUM

Figure 7.5 Switchboard connector

A–I

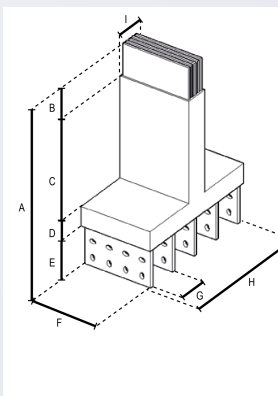

Standard, in mm:

A 600 · B 100 · C 301.4 · D 78.6

E 120 · G 100 · H 430 · I 78.6

F = bar height by rating (Table 7.2).

Special connector: only C changes.

Maximum C: 2,800mm indoor · 2,700mm outdoor.

Connector with bend: to order, after technical review.

Joint

One-piece joint with high contact pressure.

Connects all conductors at the same time.

Tighten the bolts to the label torque.

Compatible with GMA busway only.

7.8 · GMA

GMC or GMA: how to choose and order

Both are encapsulated GM busway.
Conductor, current range and origin differ.

7.8.1 GMC and GMA compared

	GMC · copper	GMA · aluminum
Conductor	Electrolytic copper	Aluminum
Manufacturing	China, Wetown Electric Group	Colombia, BYB Electric Colombia
Rated current	400–5,000A	250–4,000A
Voltage	Operating 400–690V Insulation 690/1,000V	Operating 690V Insulation 1,000V
Degree of protection	IP68, resin-fused joints	Indoor: IP55, IP65 or IP68 Outdoor: IP68
Indoor / outdoor use	Single model	Indoor, or outdoor with UV coating
Short-circuit, I _{cw} 1s	30–100kA	20–100kA
Bar width	100mm (4-wire) · 120mm (5-wire)	78.6mm
Temperature	Ambient –50°C to +55°C	Design ambient 30°C Maximum operating 75°C
Standards	GB 7251 · IEC 439, per manufacturer	IEC 61439-6 · UNE-EN 61439-6
Impedance and voltage drop	Table 4.2	Resistance and voltage drop, Table 7.3
Choose it if...	Above 4,000A or copper required	Up to 4,000A: the default option

7.9 How to specify and order

1

Rating

250–4,000A.
Above 4,000A: GMC.

2

Use

Indoor, or outdoor
with UV coating.

3

IP rating

Indoor: IP55, IP65
or IP68. Outdoor: IP68.

4

System

3P + N 100% or 200%
+ 100% ground.

GMA · outdoor use · IP68 · 2,000A · 3P + N 100% + PE 100%

GM is quoted as GMA by default.

GMC is quoted if the specification calls for copper, the rating exceeds 4,000A, or you choose it.

Each run in a project can have its own use and IP rating.

The quote includes the joints for every run.

8 · Quote your project

From drawings to estimate in minutes

Our AI system reads your bill of materials and sends you a reference estimate. An engineer reviews it.

Upload your project at electridistro.com
Excel, PDF or image of your bill of materials

Get a quote →



How it works



Upload your document

Bill of materials, drawings or specification.



AI reads it

Identifies straight lengths, bends, boxes and ratings.



Get your estimate

A reference PDF arrives in your inbox instantly.



Engineering review

Our team reviews it within 48 h; if there is an error, we send a correction.

COMMERCIAL PARTNERS

Do you install or specify busway?

Register as an ElectriDistro Commercial Partner. No exclusivity.



Unit pricing
on your quotes



Client referrals
in your region



Project discounts
per project



Technical support
live

Register →

electridistro.com/integrator



electridistro.com

Product catalog and contact



Accepted formats

Excel, CSV, PDF, PNG or JPG



Engineering review

Within 48 h max.

WETOWN
GMC manufacturer



ElectriDistro
Exclusive distributor



 Ecuador  Colombia  Peru
Authorized distribution channels